

B-SYSTEM

INSTALLATION SOLUTIONS

Dryboxx Invisible

Stealth S: LR 6G, LRX-85 (Mid/Tweeter)

Stealth M: LR 8G, LRX-83, B 22G, SLR 8G

Stealth L: LR 3G, B 30G, LRX-85 (Woofer)

Data Sheet



Installation

Stealth S: LR 6G, LRX-85 (Mid/Tweeter)

Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.



Description

Especially developed for the Stealth invisible speakers, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

Features and Benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

Scope of Delivery (per piece)

- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 615 × 411 × 12 mm
- 1 printed installation instruction

Type	Dryboxx Invisible Stealth S LR 6G, LRX-85
SKU	1501470
Dimensions	555 × 430 × 97 mm (L × W × H)
Cut-out dimension X	338 × 235
Internal volume	24.35 l
Pallet unit	24 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)




Video installation guide

<https://b-system.com/dryboxx-invisible-stealth>

Stealth M: LR 8G, LRX-83, B 22G, SLR 8G

Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.

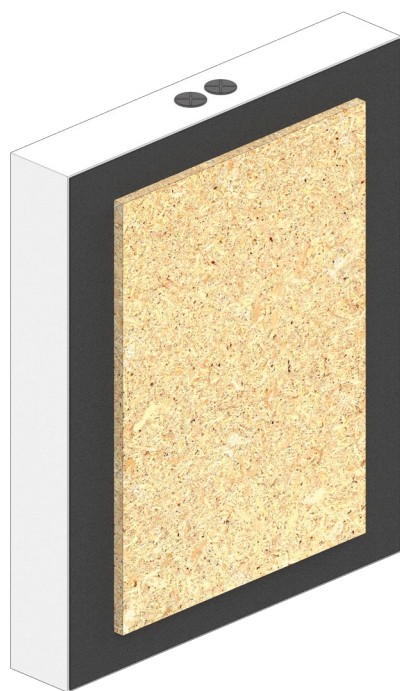

Description

Especially developed for the Stealth invisible speakers, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

Features and Benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

Scope of Delivery (per piece)


- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 411 × 411 × 12 mm
- 1 printed installation instruction

Type	Dryboxx Invisible Stealth M LR 8G, LRX-83, B 22G, SLR 8G
SKU	1501460
Dimensions	555 × 670 × 97 mm (L × W × H)
Cut-out dimension X	485 × 250
Internal volume	20.00 l
Pallet unit	28 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)




Video installation guide

<https://b-system.com/dryboxx-invisible-stealth>

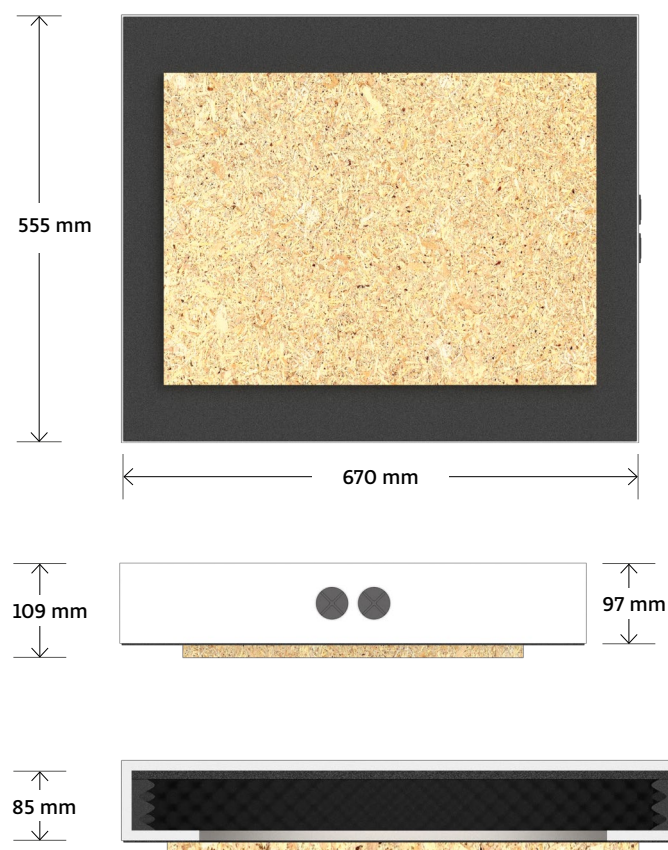

Stealth L: LR 3G, B 30G, LRX-85 (Woofer)

Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.

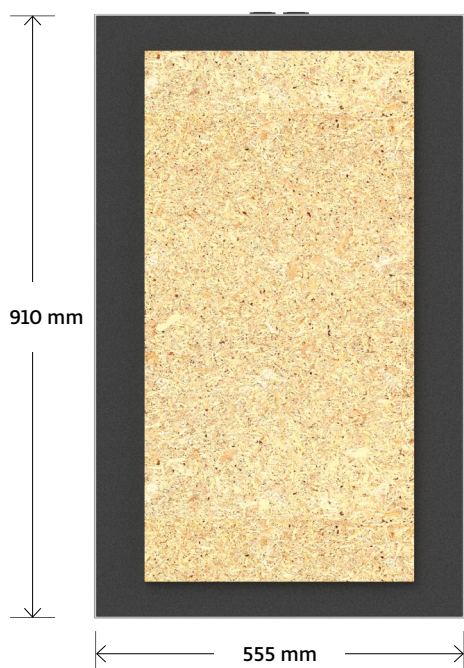

Description

Especially developed for the Stealth invisible speakers, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

Features and Benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

Scope of Delivery (per piece)


- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 730 × 411 × 12 mm
- 1 printed installation instruction

Type	Dryboxx Invisible Stealth L LR 3G, B 30G, LRX-85
SKU	1501480
Dimensions	910 × 555 × 97 mm (L × W × H)
Cut-out dimension X	680 × 250
Internal volume	33.40 l
Pallet unit	12 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)



Video installation guide

<https://b-system.com/dryboxx-invisible-stealth>

A large, abstract graphic composed of several overlapping, light-colored geometric shapes (polygons) on a dark blue background, creating a sense of depth and structure.

B-SYSTEM GmbH
Bismarckstraße 19
78652 Deisslingen
Germany

Phone: +49 (0)7420 889-889
E-mail: info@b-system.com
Web: www.b-system.com