

B-SYSTEM

INSTALLATION SOLUTIONS

Dryboxx




Universal

Data sheet



Installation
Video

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

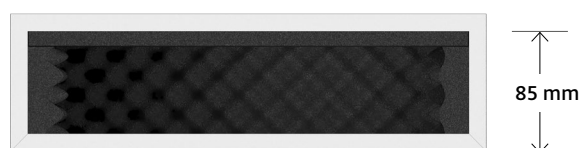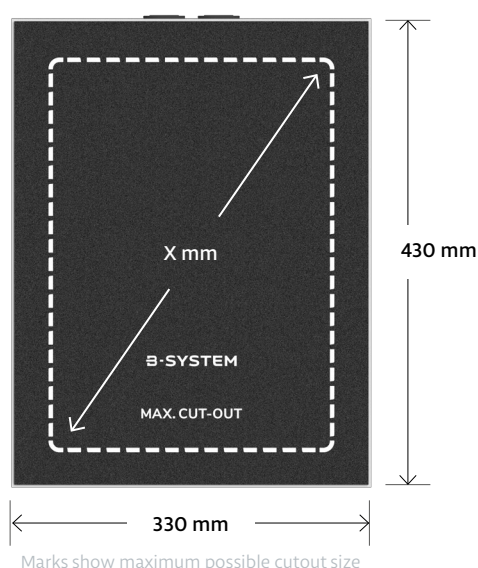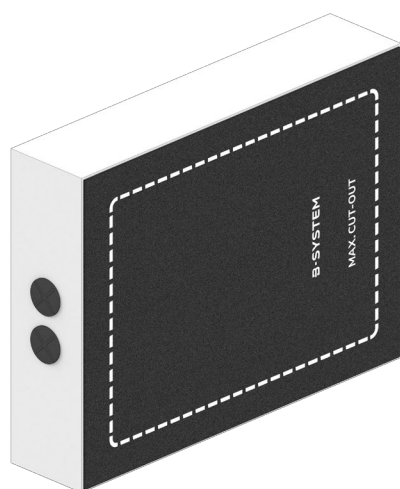

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)





- 1 Dryboxx XS made of MDF white, mitered

Type	Dryboxx XS
SKU	1000510
Dimensions	430 × 330 × 97 mm (L × W × H)
Installation depth	97.5 mm (85+12.5 mm plasterboard)
Cut-out dimension X	circular: max. 260 mm square: 330 × 230 mm
Internal volume	8.80 l
Pallet unit	48 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

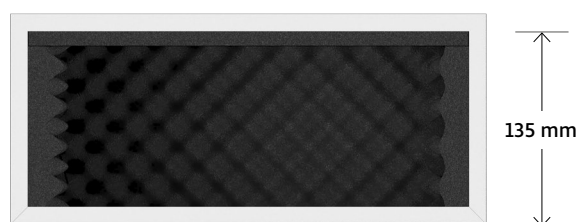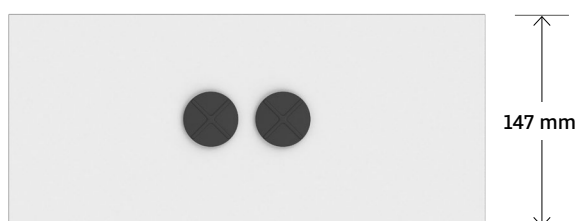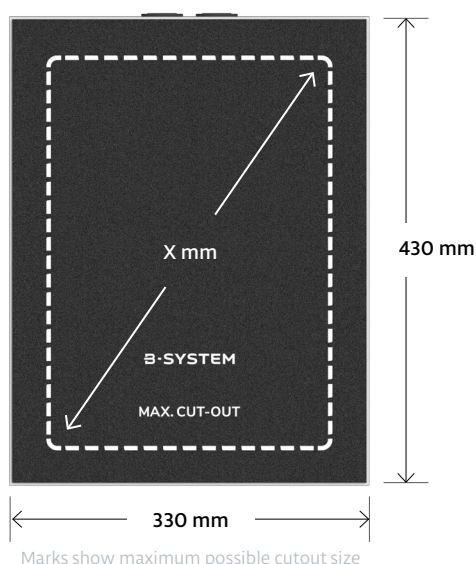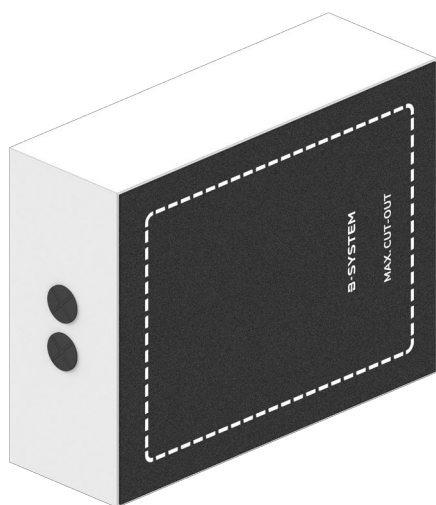

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)




- 1 Dryboxx S made of MDF white, mitered

Type	Dryboxx S
SKU	1000520
Dimensions	430 × 330 × 147 mm (L × W × H)
Installation depth	147.5 mm (135+12.5 mm plasterboard)
Cut-out dimension X	circular: max. 260 mm square: 330 × 230 mm
Internal volume	15.00 l
Pallet unit	36 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

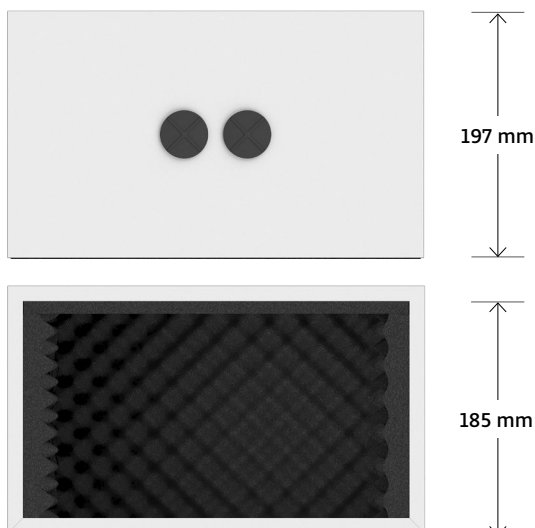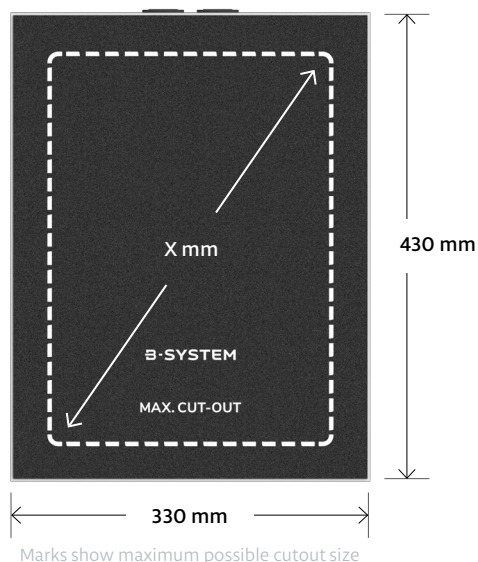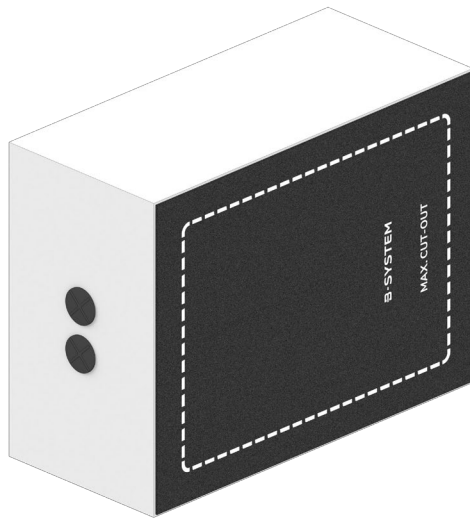

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)





- 1 Dryboxx M made of MDF white, mitered

Type	Dryboxx M
SKU	1000530
Dimensions	430 × 330 × 197 mm (L × W × H)
Installation depth	197.5 mm (185+12.5 mm plasterboard)
Cut-out dimension X	circular: max. 260 mm square: 330 × 230 mm
Internal volume	21.20 l
Pallet unit	28 pieces
Pallet dimensions	120 × 80 × 190 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

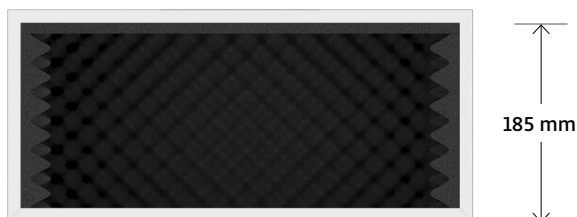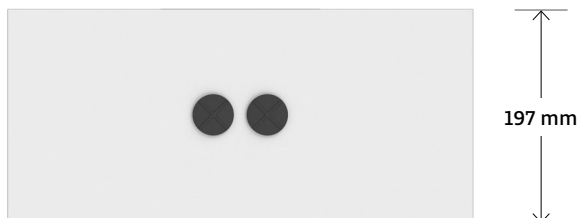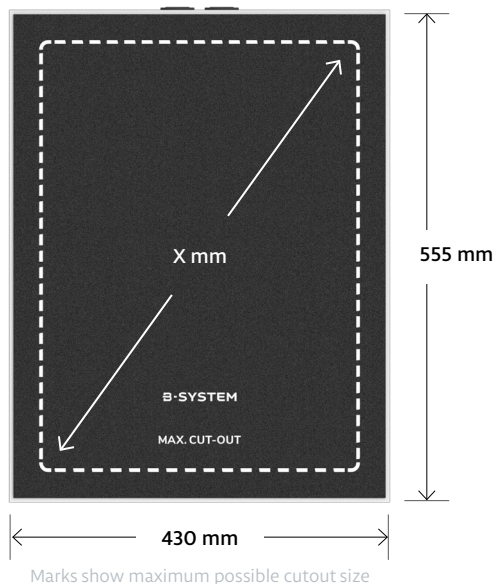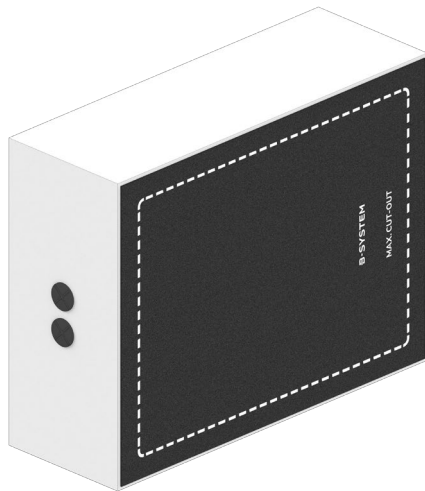

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)



- 1 Dryboxx L made of MDF white, mitered

Type	Dryboxx L
SKU	1000540
Dimensions	555 × 430 × 197 mm (L × W × H)
Installation depth	197.5 mm (185+12.5 mm plasterboard)
Cut-out dimension X	circular: max. 360 mm square: 455 × 330 mm
Internal volume	36.90 l
Pallet unit	18 pieces
Pallet dimensions	120 × 80 × 190 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

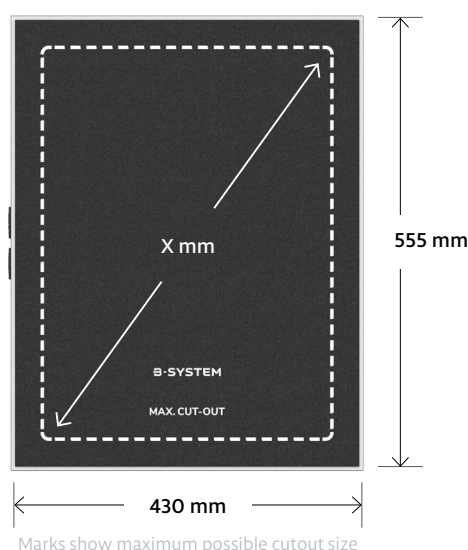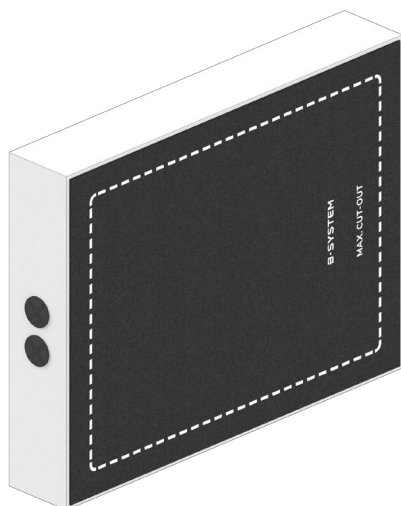

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)



- 1 Dryboxx wall XS made of MDF white, mitered

Type	Dryboxx wall XS
SKU	1000550
Dimensions	555 × 430 × 97 mm (L × W × H)
Installation depth	97.5 mm (85+12.5 mm plasterboard)
Cut-out dimension X	max. 455 × 330 mm (L × W)
Internal volume	15.30 l
Pallet unit	24 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

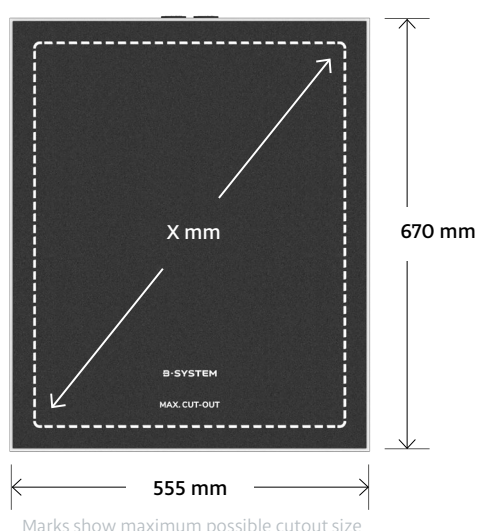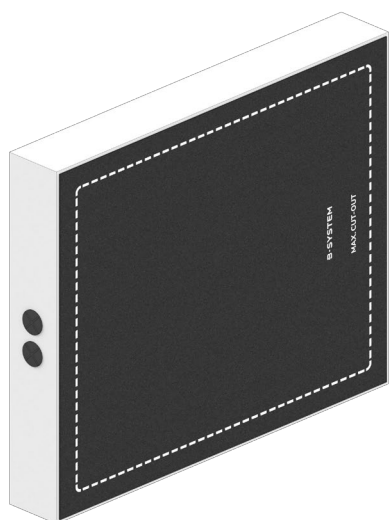

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)



- 1 Dryboxx wall S made of MDF white, mitered

Type	Dryboxx wall S
SKU	1000560
Dimensions	670 × 555 × 97 mm (L × W × H)
Installation depth	97.5 mm (85+12.5 mm plasterboard)
Cut-out dimension X	max. 570 × 455 mm (L × W)
Internal volume	24.40 l
Pallet unit	24 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

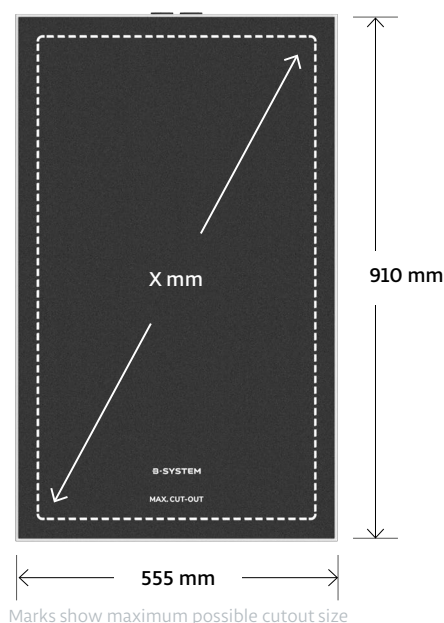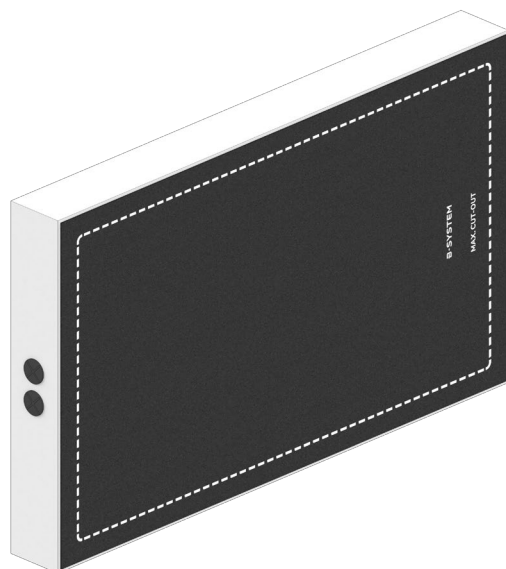

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)




- 1 Dryboxx wall M made of MDF white, mitered

Type	Dryboxx wall M
SKU	1000570
Dimensions	910 × 555 × 97 mm (L × W × H)
Installation depth	97.5 mm (85+12.5 mm plasterboard)
Cut-out dimension X	max. 810 × 455 mm (L × W)
Internal volume	33.40 l
Pallet unit	12 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>

Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

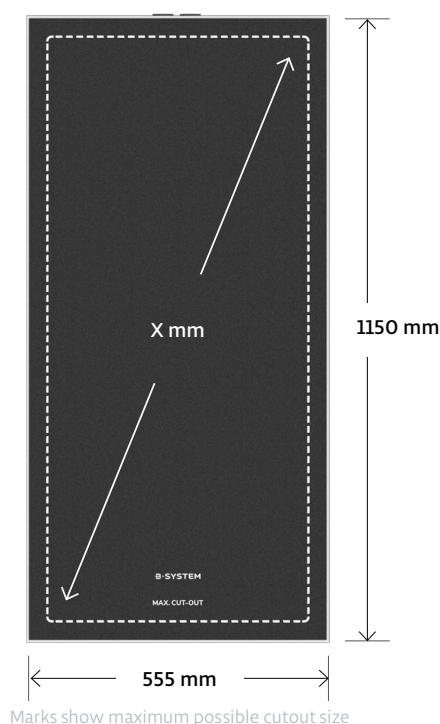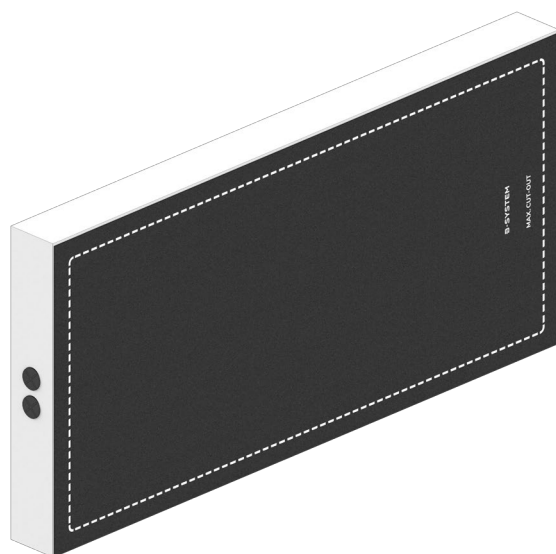

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)

- 1 Dryboxx wall L made of MDF white, mitered

Type	Dryboxx wall L
SKU	1000580
Dimensions	1150 × 555 × 97 mm (L × W × H)
Installation depth	97.5 mm (85+12.5 mm plasterboard)
Cut-out dimension X	max. 1050 × 455 mm (L × W)
Internal volume	42.50 l
Pallet unit	12 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>



B-SYSTEM GmbH
Bismarckstraße 19
78652 Deisslingen
Germany

Phone: +49 (0)7420 889-889
E-mail: info@b-system.com
Web: www.b-system.com