

# B-SYSTEM

INSTALLATION SOLUTIONS

## Dryboxx Invisible

Sonance IS6, IS8, IS10, IS10W

Data sheet





Installation  
Video

# Dryboxx Invisible

Data sheet

## Sonance IS6

Suitable for Sonance IS6 Invisible speakers. Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.

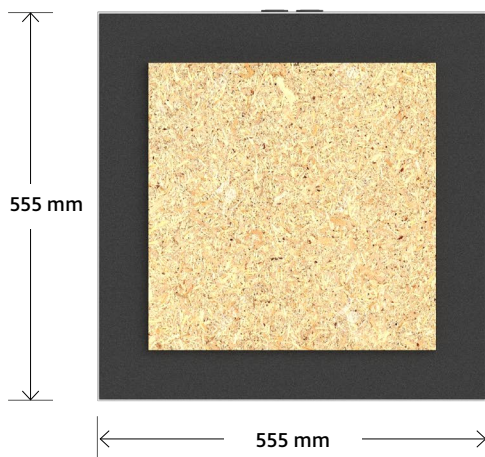

## Description

Especially developed for the Sonance Invisible series, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

## Features and benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- dimensions suitable for all commercially available dry wall dimensions with 400 mm, 500 mm and 625 mm grid

**i** All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

## Scope of delivery (per piece)

- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 411 × 411 × 12 mm
- 1 printed installation instruction

Type	Dryboxx Invisible IS6
SKU	1501600
Dimensions	555 × 555 × 97 mm (L × W × H)
Cut-out dimension X	suitable for Sonance IS6 340 × 250 mm
Internal volume	20.00 l
Pallet unit	28 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)





Video installation guide  
<https://b-system.com/dryboxx-invisible>

# Dryboxx Invisible

Data sheet

## Sonance IS8 & Sonance IS10W

Suitable for Sonance IS8 & Sonance IS10W Invisible speakers. Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.

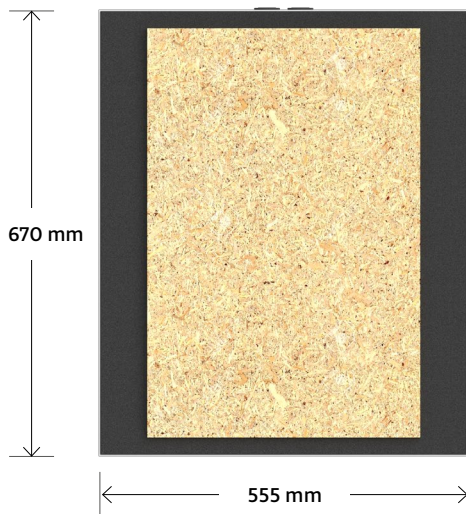

## Description

Especially developed for the Sonance Invisible series, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

## Features and benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- dimensions suitable for all commercially available dry wall dimensions with 400 mm, 500 mm and 625 mm grid

**i** All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

## Scope of delivery (per piece)

- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 615 × 411 × 12 mm
- 1 printed installation instruction


Type	Dryboxx Invisible IS8/IS10W
SKU	1501400
Dimensions	670 × 555 × 97 mm (L × W × H)
Cut-out dimension X	suitable for Sonance IS8 & Sonance IS10W 540 × 250 mm
Internal volume	24.35 l
Pallet unit	24 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)



Video installation guide  
<https://b-system.com/dryboxx-invisible>

### Sonance IS10

Suitable for Sonance IS10 Invisible speakers. Backbox easy and safe to mount, decoupling function, noise reduction and supporting of the sound quality.

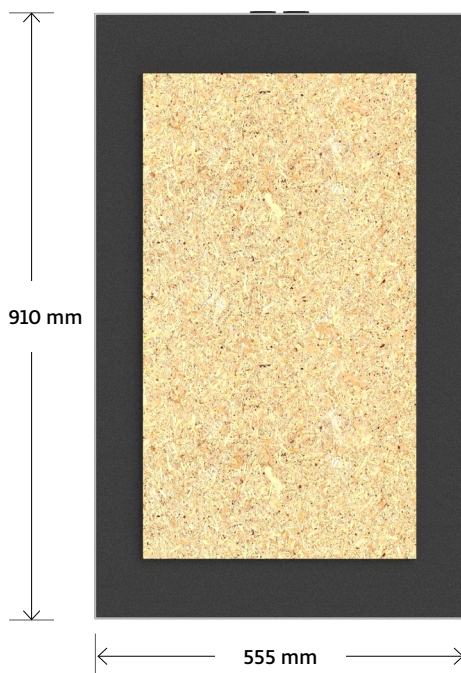

### Description

Especially developed for the Sonance Invisible series, acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic damping foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat.

### Features and benefits

- easy installation, safety in mounting the loudspeaker
- supports the sound quality of the loudspeaker
- perfect protection against dust, insects, moisture and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- dimensions suitable for all commercially available dry wall dimensions with 400 mm, 500 mm and 625 mm grid

**i** All Dryboxx Invisible backboxes are suitable for both in-ceiling and in-wall installation.

### Scope of delivery (per piece)

- 1 Dryboxx Invisible made of MDF white, mitered
- 1 placeholder board (OSB) 730 × 411 × 12 mm
- 1 printed installation instruction

Type	Dryboxx Invisible IS10
SKU	1501500
Dimensions	910 × 555 × 97 mm (L × W × H)
Cut-out dimension X	suitable for Sonance IS10 655 × 250 mm
Internal volume	33.40 l
Pallet unit	12 pieces
Pallet dimensions	120 × 80 × 180 cm (L × W × H)



Video installation guide  
<https://b-system.com/dryboxx-invisible>

# **B-SYSTEM**

INSTALLATION SOLUTIONS

**B-SYSTEM** GmbH  
Bismarckstraße 19  
78652 Deisslingen  
Germany

Phone: +49 (0)7420 889-889  
E-mail: [info@b-system.com](mailto:info@b-system.com)  
Web: [www.b-system.com](http://www.b-system.com)